

Foot Compression Test Stand

320-0000

The Humanetics Foot Compression Test Fixture meets the Hybrid III 50th and 95th 45 degree foot test requirements established by the Society of Automotive Engineers (SAE). by using optional equipment the Hybrid III 5th female dummy can also be tested. This is a compact, sturdy test apparatus to perform the certification testing for foot compression.

Description


Designed for 110-volt, 60-HzAC or 220-volt, 50-HzAC power, the Foot Compression fixture includes a load cell, linear actuator and controller. Two channels are required to run the Foot Compression Test Fixture.

Standard Equipment

- Rigid support fixture
- Load cell
- Linear actuator and controller
- Ankle shell assembly and adapter for the Hybrid III 50th and 95th
- Leveling top plate and screws for the Hybrid III 50th and 95th

Optional Equipment

- Ankle shell assembly for the Hybrid III 5th

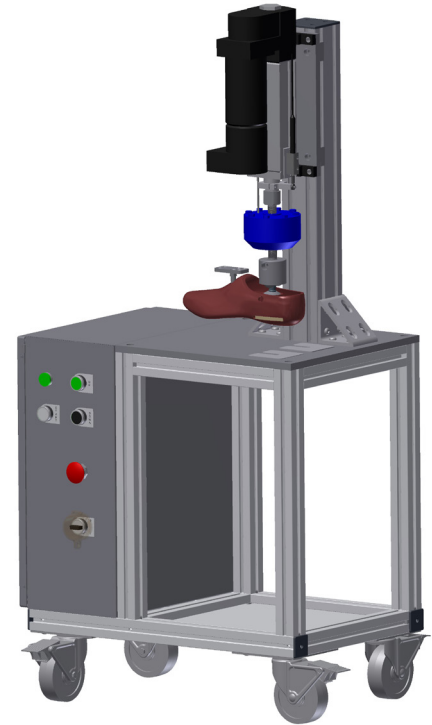

Dimensions	Fixture	Work Area
Length	1' 6"	3.0 ft
Width	2' 2"	3.0 ft
Height	4' 6" (with stand)	-